

BK 20



Short description

Electric shutter with bimetal cap for ventilation channels, DN 200

Article number 0093.0900


Technical data

Loss of pressure	11 Pa
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Nominal output	25 W
I _{nom}	0,1 A
I _{max}	1,8 A
Starting current	1,8 A / 1 s
Degree of protection	IP 55
Drive	Bimetal
Installation	outside
Installation site	Wall
Installation position	vertical
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Lamella colour	Silver grey
Weight	1,14 kg
Weight including packaging	1,3 kg
Type of shutter	electrical
Suitable for nominal size	200 mm
Width	325 mm
Height	325 mm
Depth	50,5 mm
Width with packaging	335 mm
Height with packaging	335 mm
Depth with packaging	60 mm
Ambient temperature	40 °C
Packing unit	1 piece
Range	C

BK 20

GTIN (EAN)	4012799939009
------------	---------------

Dimensioned drawing [mm]

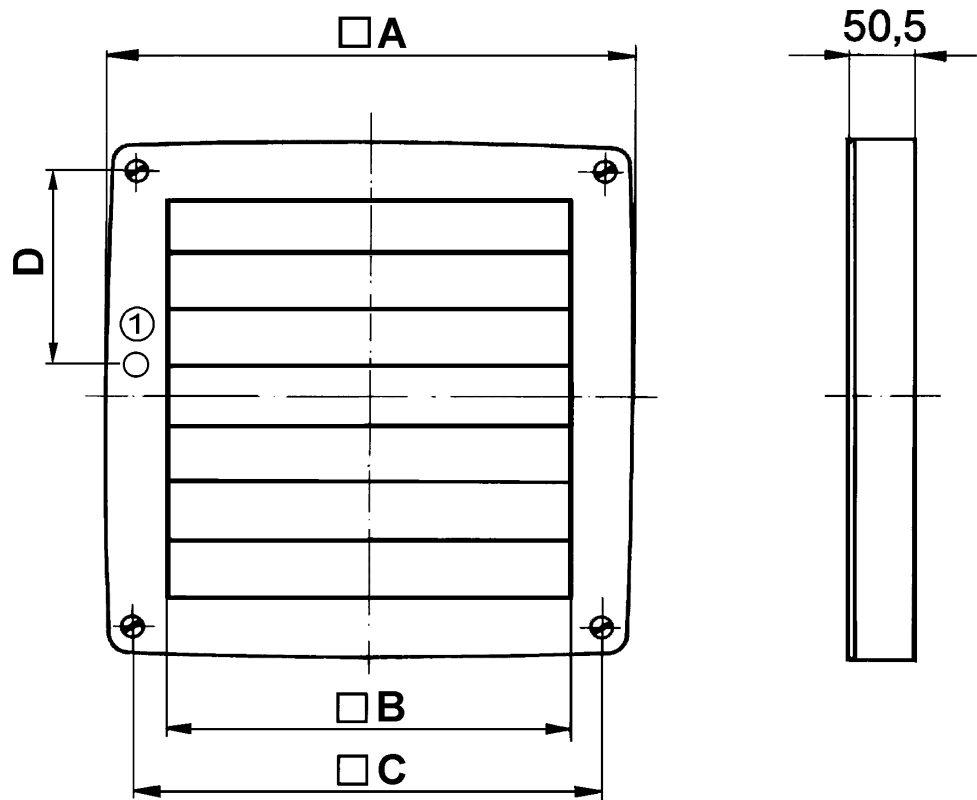

A	B	C	D
325	218	275	83

① Cable entry