


# DAR 80/8 0,75

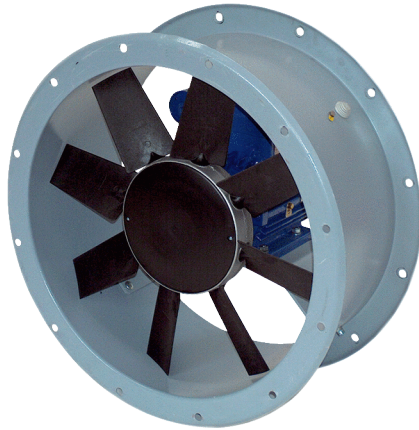

## Short description

Axial duct fan, DN 800, three-phase AC, nominal power 0.75 kW, 8-pin

## Application examples

Production facility, Workplace, Commercial premises, Industrial building

Article number 0073.0149

## Technical data

|   |                                |
|---|--------------------------------|
| Air flow volume                           | 20.124 m³/h                    |
| Rotating speed                            | 720 1/min                      |
| Impeller type                             | axial                          |
| Speed controllable                        | ✓                              |
| Reversing capacity                        | –                              |
| Type of voltage                           | Three-phase AC                 |
| Rated voltage                             | 400 V                          |
| Frequency                                 | 50 Hz                          |
| Nominal output                            | 750 W                          |
| I <sub>nom</sub>                          | 2,24 A                         |
| Degree of protection                      | IP 55                          |
| Insulation class                          | F                              |
| Pole-changeable                           | –                              |
| Installation site                         | Duct                           |
| Installation position                     | Horizontal                     |
| Housing material                          | Sheet steel with epoxy coating |
| Impeller material                         | Polyamide                      |
| Colour                                    | grey                           |
| Weight                                    | 75 kg                          |
| Weight including packaging                | 91 kg                          |
| Nominal size                              | 800 mm                         |
| Width                                     | 910 mm                         |
| Height                                    | 590 mm                         |
| Depth                                     | 910 mm                         |
| Width with packaging                      | 1.140 mm                       |
| Height with packaging                     | 740 mm                         |
| Depth with packaging                      | 1.140 mm                       |
| Airstream temperature at I <sub>Max</sub> | -10 °C up to 50 °C             |
| PTC DIN 44082                             | M 100                          |

# DAR 80/8 0,75

|              |               |
|--------------|---------------|
| Packing unit | 1 piece       |
| Range        | C             |
| GTIN (EAN)   | 4012799731498 |

## Technical data according to ErP in Best Efficiency Point (BEP)

|  |  |
|--|--|
| Total efficiency $\eta$  | 33,4 %   |
| Measurement category   | C  |
| Efficiency category  | static   |
| Efficiency level N   | 40,3   |
| VSD necessary  | No   |
| Year of manufacture  | see rating plate   |
| Manufacturer's name / official registration number / manufacturer's place of establishment | Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen |
| Art. No.   | 0073.0149  |
| $P_{BEP}$ / Air volume $_{BEP}$ / $P_{fs, BEP}$  | 0,819 kW / 13.068 m <sup>3</sup> /h / 75,4 Pa  |
| $n_{BEP}$  | 720 1/min  |
| Specific ratio   | $\approx 1$  |
| Information about dismantling and disposal   | see mounting instructions  |
| Information about installation, operation and repairs                                      | see mounting instructions  |
| Objects used to measure efficiency which are not described by the measurement category     | -  |
| $I_{BEP}$  | 2,24 A   |
| Sound power level $L_{WA7}$  | 79 dB(A)   |


## Sound power level in octave range

|   | 63 Hz | 125 Hz | 250 Hz | 500 Hz | 1 kHz | 2 kHz | 4 kHz | 8 kHz | Total |
|---|-------|--------|--------|--------|-------|-------|-------|-------|-------|
| <b><math>L_{WA5, S5}</math><br/>(dB(A))</b> | 61    | 68     | 73     | 74     | 73    | 71    | 70    | 62    | 79    |

$L_{WA5}$ = free inlet sound power level in dB.

# DAR 80/8 0,75

## Characteristic curve

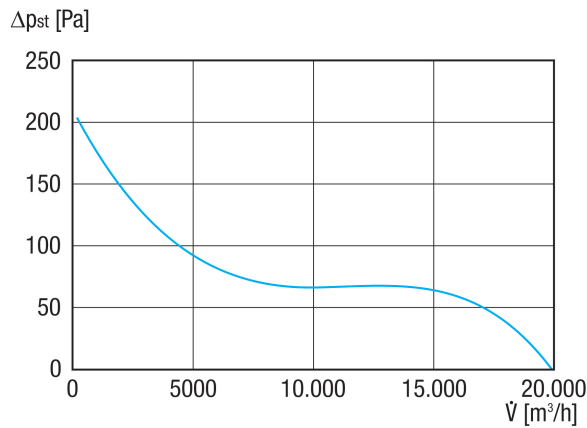

## Dimensioned drawing [mm]

