

# DRD HT 35/4



## Short description

Centrifugal roof fan for high temperatures, nominal power 0.25 kW, three-phase AC

## Application examples

Residential building, Industrial building, Commercial building

Article number 0073.0012

## Technical data

Air flow volume	3.341 m³/h
Rotating speed	1.460 1/min
Impeller type	radial
Speed controllable	✓
Reversing capacity	–
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	250 W
I <sub>nom</sub>	0,85 A
Degree of protection	IP 55
Insulation class	F
Pole-changeable	–
Installation site	Roof
Installation position	vertical
Housing material	Aluminium/galvanised sheet steel
Impeller material	Sheet steel, galvanised
Colour	Silver
Weight	30 kg
Weight including packaging	30,5 kg
Size	350
Width	815 mm
Height	540 mm
Depth	815 mm
Width with packaging	830 mm
Height with packaging	600 mm
Depth with packaging	830 mm
Airstream temperature at I <sub>Max</sub>	65 °C up to 150 °C
PTC DIN 44082	M 100

# DRD HT 35/4


Packing unit	1 piece
Range	C
GTIN (EAN)	4012799730125

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA5, S5</sub></b> <b>(dB(A))</b>	48,2	61,9	68,1	72,9	73	69,5	64,6	53,9	77,7

L<sub>WA5</sub>= free inlet sound power level in dB.

## Characteristic curve

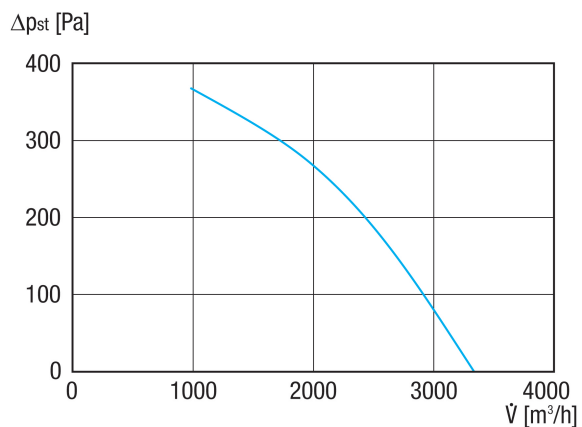

# DRD HT 35/4

Dimensioned drawing [mm]

