

DRD V 56/6 Ex



Short description

Centrifugal roof fan, vertical air outlet, nominal power 0.55 kW, air volume 9032 m³/h, three-phase AC, for use in potentially explosive atmospheres, medium: gas

Application examples

Industrial building, Commercial hall

Article number 0073.0551

Technical data

Air flow volume	9.032 m ³ /h
Rotating speed	970 1/min
Impeller type	radial
Speed controllable	✓
Reversing capacity	–
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	550 W
I _{nom}	1,7 A
Degree of protection	IP 55
Insulation class	F
Pole-changeable	–
Installation site	Roof
Installation position	vertical
Material	Sheet steel, galvanised
Housing material	Sheet steel, galvanised
Colour	grey
Weight	76 kg
Weight including packaging	82 kg
Size	560
Width	1.200 mm
Height	830 mm
Depth	1.200 mm
Width with packaging	1.300 mm
Height with packaging	1.485 mm
Depth with packaging	1.300 mm
EX designation in accordance with the ATEX Directive	Ex II 2 G
EX designation in accordance with standard	Ex db IIB+H2 T4 Gb X / Ex h IIB+H2 T4 Gb X

DRD V 56/6 Ex


Ta ambient temperature	-20 °C ≤ Ta ≤ +60 °C
Operating mode	S1
PTC DIN 44082	M 100
Temperature class	T4
Packing unit	1 piece
Range	G
GTIN (EAN)	4012799735519

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA5, S5} (dB(A))	53	77	76	76	75	78	70	64	84

L_{WA5}= free inlet sound power level in dB.

Characteristic curve

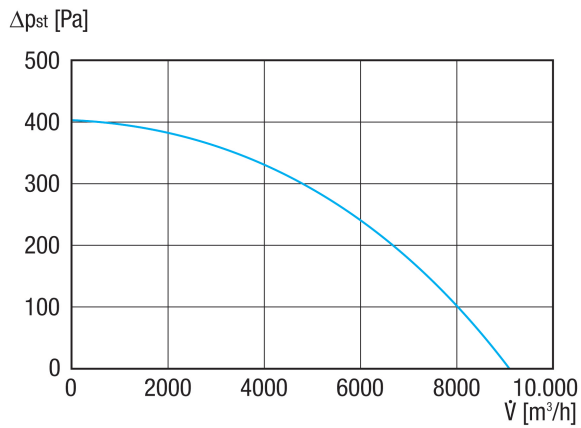

Dimensioned drawing [mm]

