

DSK 31 EC



Short description

Sound-insulated centrifugal channel fan, EC motor, alternating current, channel dimension 600 mm x 350 mm

Application examples

Commercial premises, Workplace, Showroom, Production facility, Industrial building

Article number 0086.0803

Technical data

Model	sound-insulated
Air flow volume	3.500 m ³ /h
Air volume _{nom}	2.100 m ³ /h (in opt. efficiency)
Pressure p _{fs, nom}	328 Pa (in opt. efficiency)
Rotating speed n _{nom}	1.500 1/min (in opt. efficiency)
Rotating speed	1.500 1/min
Speed controllable	✓
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Nominal output	349 W
I _{nom}	1,6 A
Degree of protection	IP 54
Insulation class	F
Installation site	Channel
Installation position	any
Housing material	Sheet steel, galvanised
Weight	38,5 kg
Weight including packaging	39,02 kg
Swivelling fan	✓
Channel dimension	600 mm x 350 mm
Width	680 mm
Height	390 mm
Depth	700 mm
Width with packaging	682 mm
Height with packaging	447 mm
Depth with packaging	702 mm
Airstream temperature	-25 °C up to 50 °C
Packing unit	1 piece
Range	E

DSK 31 EC


GTIN (EAN)	4012799868033
------------	---------------

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2, S5} (dB(A))	–	55	54	47	47	44	38	32	59
L_{WA5, S5} (dB(A))	–	57	63	59	59	61	57	48	68
L_{WA6, S5} (dB(A))	–	66	67	70	71	70	63	54	76

L_{WA2}= housing sound power level in dB.
 L_{WA5}= free inlet sound power level in dB.
 L_{WA6}= free outlet sound power level in dB.

Characteristic curve

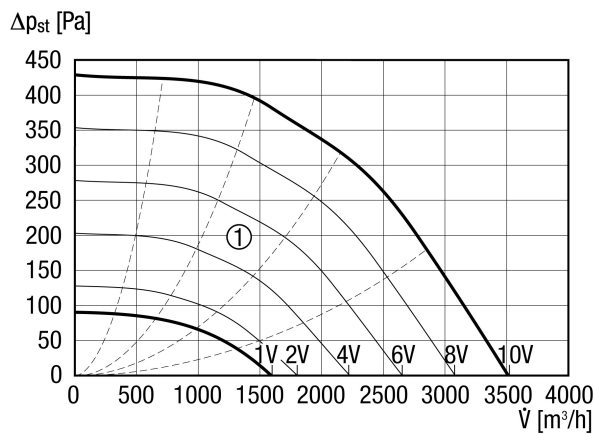

Auxiliary characteristics curves for control voltage 1 - 10 V

DSK 31 EC

Dimensioned drawing [mm]

