


# DZQ 60/4 B

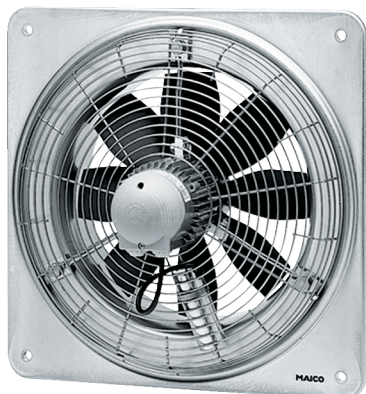

## Short description

Axial wall fan with square wall plate, DN 600, three-phase AC

## Application examples

Production facility, Commercial premises, Garage, Building container, Storage facility

Article number 0083.0134

## Technical data

Model	Square wall plate
Air flow volume	14.560 m <sup>3</sup> /h
Air volume <sub>nom</sub>	10.800 m <sup>3</sup> /h (in opt. efficiency)
Pressure p <sub>fs, nom</sub>	175 Pa (in opt. efficiency)
Rotating speed n <sub>nom</sub>	1.370 1/min (in opt. efficiency)
Rotating speed	1.417 1/min
Impeller type	axial
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	1.385 W (in opt. efficiency)
I <sub>nom</sub>	2,2 A (in opt. efficiency)
I <sub>max</sub>	3,5 A
Degree of protection	IP 55
Insulation class	F
Pole-changeable	–
Mains cable	7 x 1,5 mm <sup>2</sup>
Installation site	Wall / Ceiling
Type of installation	Surface-mounted
Installation position	horizontal / vertical
Material	Sheet steel, galvanised
Colour	Silver
Weight	33,32 kg
Weight including packaging	38,88 kg
Nominal size	600 mm
Width	820 mm
Height	820 mm

# DZQ 60/4 B

Depth	401 mm
Width with packaging	850 mm
Height with packaging	850 mm
Depth with packaging	435 mm
Airstream temperature at nominal current	-20 °C up to 60 °C
Airstream temperature at $I_{Max}$	-20 °C up to 60 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799831341

## Technical data according to ErP in Best Efficiency Point (BEP)

Total efficiency $\eta$	37,9 %
Measurement category	A
Efficiency category	static
Efficiency level N	43,3
VSD necessary	No
Year of manufacture	see rating plate
Manufacturer's name / official registration number / manufacturer's place of establishment	Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen
Art. No.	0083.0134
$P_{BEP}$ / Air volume $_{BEP}$ / $P_{fs, BEP}$	1,385 kW / 10.800 m <sup>3</sup> /h / 175 Pa
$\eta_{BEP}$	1.370 1/min
Specific ratio	$\approx 1$
Information about dismantling and disposal	see mounting instructions
Information about installation, operation and repairs	see mounting instructions
Objects used to measure efficiency which are not described by the measurement category	-
Sound power level $L_{WA7}$	86 dB(A)

## Sound power level in octave range


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA7, S1}$ (dB(A))	-	-	-	-	-	-	-	-	62
$L_{WA7, S2}$ (dB(A))	-	-	-	-	-	-	-	-	73
$L_{WA7, S3}$ (dB(A))	-	-	-	-	-	-	-	-	79
$L_{WA7, S4}$ (dB(A))	-	-	-	-	-	-	-	-	83
$L_{WA7, S5}$ (dB(A))	43	58	74	79	83	81	76	67	86

# DZQ 60/4 B


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L <sub>WA8</sub> , S1 (dB(A))	-	-	-	-	-	-	-	-	73
L <sub>WA8</sub> , S2 (dB(A))	-	-	-	-	-	-	-	-	78
L <sub>WA8</sub> , S3 (dB(A))	-	-	-	-	-	-	-	-	81
L <sub>WA8</sub> , S4 (dB(A))	-	-	-	-	-	-	-	-	86
L <sub>WA8</sub> , S5 (dB(A))	60	69	76	79	83	82	81	78	88

L<sub>WA7</sub>= housing and free inlet sound power level in dB.  
 L<sub>WA8</sub>= housing and free outlet sound power level in dB.

## Characteristic curve

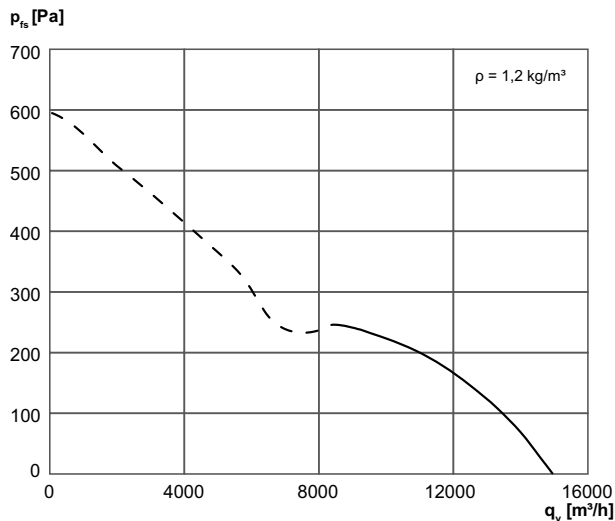

## Dimensioned drawing [mm]

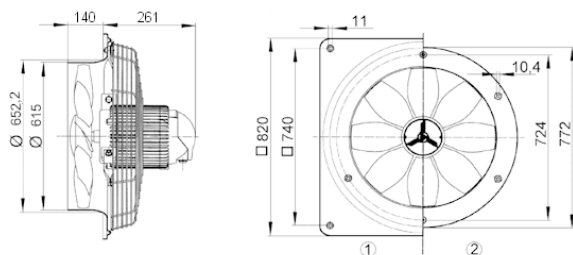

- ① Steel wall plate = EZQ/DZQ version
  - ② Steel wall ring = EZS/DZS version
- The air flow direction is marked.  
 Standard exhaust air mode, air flow direction with air drawn across motor.

# DZQ 60/4 B

