

DZS 25/4 D



Short description

Axial wall fan with steel wall ring, DN 250, three-phase AC

Application examples

Production facility, Commercial premises, Garage, Building container, Storage facility

Article number 0094.0074

Technical data

Model	Steel wall ring
Air flow volume	1.000 m ³ /h
Rotating speed	1.425 1/min
Impeller type	axial
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	45 W
I _{nom}	0,13 A
I _{max}	0,13 A
Degree of protection	IP 54
Insulation class	B
Pole-changeable	–
Mains cable	5 x 1,5 mm ²
Installation site	Wall / Ceiling
Type of installation	Surface-mounted
Installation position	horizontal / vertical
Material	Sheet steel, galvanised
Colour	Silver
Weight	3,47 kg
Weight including packaging	4,08 kg
Nominal size	250 mm
Width	400 mm
Height	400 mm
Depth	198 mm
Width with packaging	380 mm
Height with packaging	220 mm

DZS 25/4 D

Depth with packaging	380 mm
Airstream temperature at nominal current	-20 °C up to 50 °C
Airstream temperature at I _{Max}	-20 °C up to 40 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799940746

Sound power level in octave range


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA7, S1} (dB(A))	–	–	–	–	–	–	–	–	48
L_{WA7, S2} (dB(A))	–	–	–	–	–	–	–	–	57
L_{WA7, S3} (dB(A))	–	–	–	–	–	–	–	–	61
L_{WA7, S4} (dB(A))	–	–	–	–	–	–	–	–	63
L_{WA7, S5} (dB(A))	26	39	50	56	59	61	57	47	65
L_{WA8, S1} (dB(A))	–	–	–	–	–	–	–	–	47
L_{WA8, S2} (dB(A))	–	–	–	–	–	–	–	–	56
L_{WA8, S3} (dB(A))	–	–	–	–	–	–	–	–	60
L_{WA8, S4} (dB(A))	–	–	–	–	–	–	–	–	63
L_{WA8, S5} (dB(A))	29	39	51	56	58	61	57	47	65

L_{WA7}= housing and free inlet sound power level in dB.


L_{WA8}= housing and free outlet sound power level in dB.

DZS 25/4 D

Characteristic curve

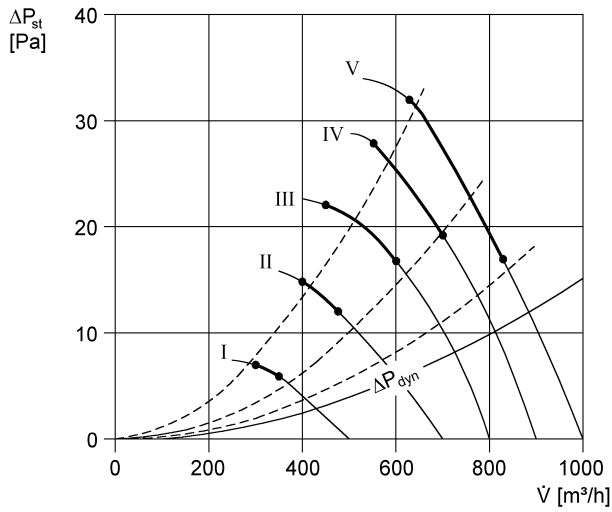

Dimensioned drawing [mm]

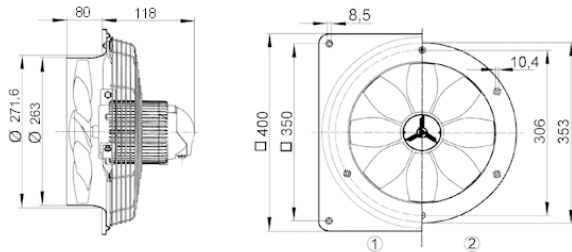

- ① Steel wall plate = EZQ/DZQ version
 - ② Steel wall ring = EZS/DZS version
- The air flow direction is marked.
Standard exhaust air mode, air flow direction with air drawn across motor.