

# ECA 120 F



## Short description

With fixed internal grille and light control

## Application examples

Bathroom, WC, Storage room, Larder, Cellar


Article number 0084.0008

## Technical data

Model	Light control
Air flow volume	170 m <sup>3</sup> /h
Rotating speed	2.600 1/min
Speed controllable	–
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Power consumption	19 W
I <sub>max</sub>	0,14 A
Degree of protection	IP 45
Mains cable	3 / 1,5 mm <sup>2</sup>
Installation site	Wall
Type of installation	Surface-mounted
Installation position	any
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	0,9 kg
Nominal size	120 mm
Width	171 mm
Height	171 mm
Depth	114 mm
Airstream temperature at I <sub>Max</sub>	40 °C
Overrun time	6 min
Start delay	50 s
Sound pressure level	42 dB(A) (Distance 3 m, Free-field conditions)
Packing unit	1 piece
Range	A
GTIN (EAN)	4012799840084


# ECA 120 F

## Characteristic curve

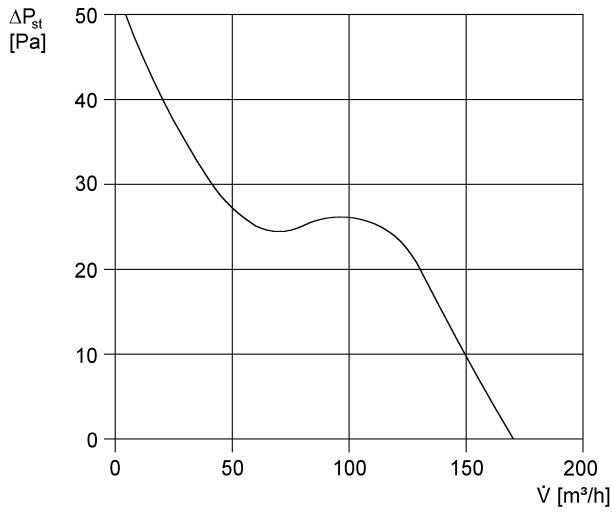

V = 230 or 24 V  
 f = 50 Hz  
 n = 2600 min<sup>-1</sup>

## Dimensioned drawing [mm]

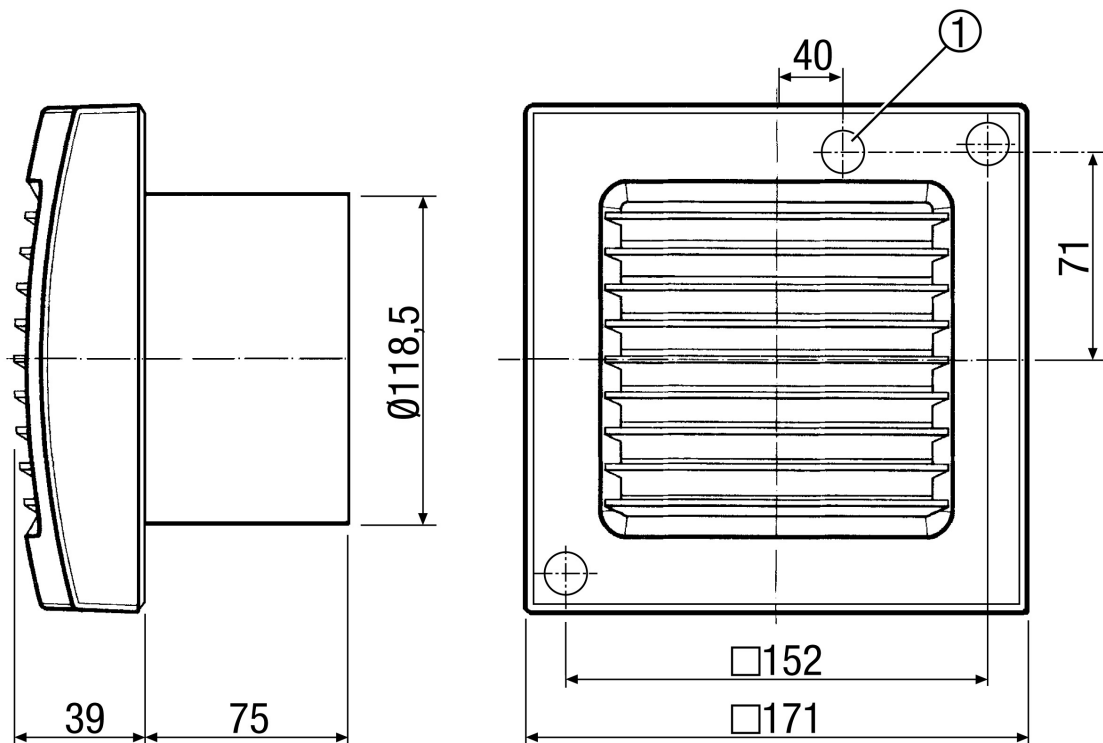

① Cable entry

# ECA 120 F

