


# EKR 25-3 EC

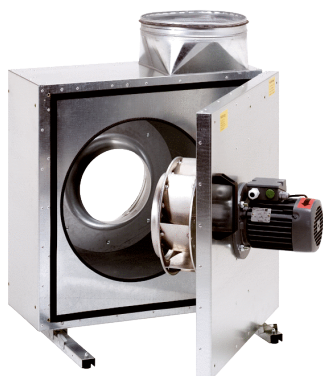

## Short description

Sound-insulated exhaust air box, DN 250, alternating current, EC technology

## Application examples

Extraction hood, Canteen kitchen, Workplace air extraction system

Article number 0080.0634

## Technical data

Air flow volume	2.850 m <sup>3</sup> /h
Rotating speed	3.650 1/min
Impeller type	radial
Air direction	Air extraction
Speed controllable	✓
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	894 W
I <sub>max</sub>	4,2 A
Degree of protection	IP 54
Installation site	Wall / ceiling / Floor
Type of installation	Surface-mounted
Installation position	vertical / horizontal
Material	Sheet steel, galvanised
Colour	Silver
Weight	36,4 kg
Weight including packaging	44,9 kg
Connection diameter	250 mm
Nominal size	250 mm
Suitable for nominal size	250 mm
Length	592 mm
Width	592 mm
Height	693 mm
Depth	549 mm
Width with packaging	745 mm
Height with packaging	735 mm
Depth with packaging	675 mm
Airstream temperature at I <sub>Max</sub>	120 °C

# EKR 25-3 EC

Ambient temperature	-20 °C up to 50 °C
Packing unit	1 piece
Range	E
GTIN (EAN)	4012799806349

## Technical data according to ErP in Best Efficiency Point (BEP)

Total efficiency $\eta$	63 %
Efficiency category	static
VSD necessary	Yes
Year of manufacture	see rating plate
Manufacturer's name / official registration number / manufacturer's place of establishment	Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen
Art. No.	0080.0634
$P_{BEP}$ / Air volume $_{BEP}$ / $P_{fs, BEP}$	0,87 kW / 1.800 m <sup>3</sup> /h
Information about dismantling and disposal	see mounting instructions
Information about installation, operation and repairs	see mounting instructions
Objects used to measure efficiency which are not described by the measurement category	see mounting instructions
$P_{f, BEP}$	901 Pa
Sound power level $_{L_{WA7}}$	80 dB(A)

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA2}$ (dB(A))	–	–	–	–	–	–	–	–	78
$L_{WA5}$ (dB(A))	–	–	–	–	–	–	–	–	86
$L_{WA6}$ (dB(A))	–	–	–	–	–	–	–	–	86


$L_{WA2}$ = housing sound power level in dB.

$L_{WA5}$ = free inlet sound power level in dB.

$L_{WA6}$ = free outlet sound power level in dB.

# EKR 25-3 EC

## Characteristic curve

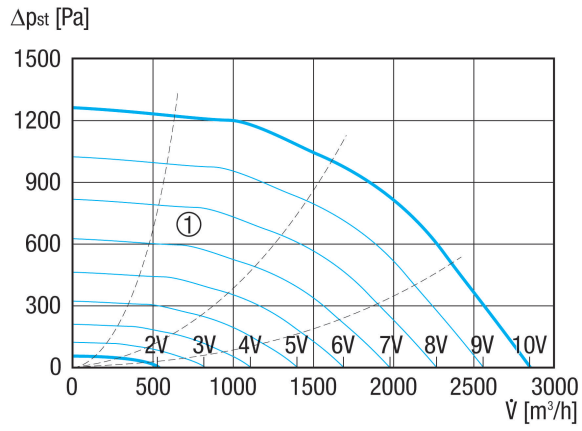

① Auxiliary characteristics for control voltage 3–10 V

# EKR 25-3 EC

Dimensioned drawing [mm]

