

# ERD H 40/4 Ex



## Short description

Centrifugal roof fan, horizontal air outlet, nominal power 0.55 kW, single-phase AC, for use in potentially explosive atmospheres, medium: gas

## Application examples

Industrial building, Commercial hall

Article number 0073.0536

## Technical data

Air flow volume	5.418 m <sup>3</sup> /h
Rotating speed	1.460 1/min
Impeller type	radial
Speed controllable	–
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	550 W
I <sub>nom</sub>	4,5 A
Degree of protection	IP 55
Insulation class	F
Pole-changeable	–
Installation site	Roof
Installation position	vertical
Material	Sheet steel, galvanised
Housing material	Sheet steel, galvanised
Colour	grey
Weight	45 kg
Weight including packaging	52 kg
Size	400
Width	910 mm
Height	670 mm
Depth	910 mm
Width with packaging	1.020 mm
Height with packaging	715 mm
Depth with packaging	1.020 mm
EX designation in accordance with the ATEX Directive	Ex II 2 G
EX designation in accordance with standard	Ex db IIB+H2 T4 Gb X / Ex h IIB+H2 T4 Gb X

# ERD H 40/4 Ex


Ta ambient temperature	-20 °C ≤ Ta ≤ +60 °C
Operating mode	S1
PTC DIN 44082	M 100
Temperature class	T4
Packing unit	1 piece
Range	G
GTIN (EAN)	4012799735366

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA5, S5</sub></b> <b>(dB(A))</b>	48	74	77	79	79	74	76	66	85

L<sub>WA5</sub>= free inlet sound power level in dB.

## Characteristic curve

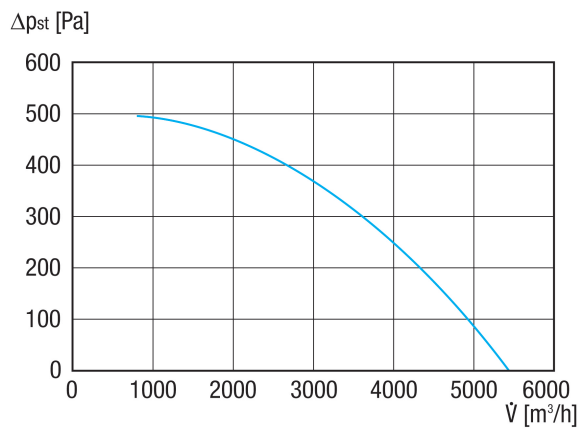

# ERD H 40/4 Ex

Dimensioned drawing [mm]

