

ERM 18 Ex t/60 Hz



Short description

Semi-centrifugal duct fan, DN 180, single-phase AC 230 V/60 Hz, explosion-proof, medium: dust

Article number 0080.0376

Technical data

Air flow volume	340 m ³ /h
Rotating speed	3.255 1/min
Speed controllable	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	60 Hz
Nominal output	88 W
cosφ	0,89
I _{nom}	0,43 A
I _{max} at U _{Nominal}	0,43 A
Degree of protection	IP 64
Insulation class	B
Mains cable	3 x 1,5 mm ²
Housing material	Synthetic material
Impeller material	Synthetic material
Colour	Signal black, similar to RAL 9004
Weight	3,54 kg
Weight including packaging	4,11 kg
Nominal size	180 mm
Width	262 mm
Height	252 mm
Depth	187 mm
Width with packaging	255 mm
Height with packaging	190 mm
Depth with packaging	240 mm
EX designation in accordance with the ATEX Directive	Ex II 2 D
EX designation in accordance with standard	Ex tb IIIC T135°C Db IP64 / Ex h IIIC T135°C Db
T _a ambient temperature	-20 °C ≤ T _a ≤ +50 °C
I _A /I _N	2,3

ERM 18 Ex t/60 Hz


Time t_E	28 sek
Operating mode	S1
EC type examination certificate	TÜV-A 18ATEX0052 X, IECEx tPS 19.0025X
Temperature class	T135°C
Capacitor capacity / voltage	3 μ F/280V
Temperature class of insulating materials Th. Cl.	130 (B)
Packing unit	1 piece
Range	G
GTIN (EAN)	4012799803768

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA5, S5} (dB(A))	34	47	56	60	63	61	56	50	67

L_{WA5}= free inlet sound power level in dB.

Characteristic curve

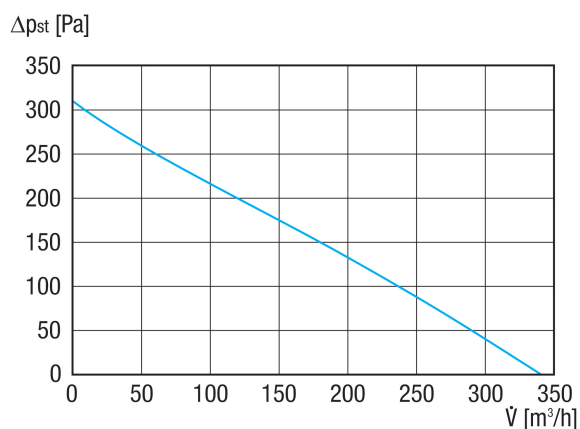

ERM 18 Ex t/60 Hz

Dimensioned drawing [mm]

