

# ERM 25 Ex t



## Short description

Semi-centrifugal duct fan, DN 250, single-phase AC 230 V/50 Hz, explosion-proof, medium: dust

Article number 0080.0468

## Technical data

Air flow volume	870 m <sup>3</sup> /h
Rotating speed	2.820 1/min
Speed controllable	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	300 W
cosφ	0,93
I <sub>nom</sub>	1,4 A
I <sub>max</sub> at U <sub>Nominal</sub>	1,4 A
Degree of protection	IP 64
Insulation class	F
Mains cable	3 x 1,5 mm <sup>2</sup>
Housing material	Synthetic material
Impeller material	Synthetic material
Colour	Signal black, similar to RAL 9004
Weight	7,18 kg
Weight including packaging	7,38 kg
Nominal size	250 mm
Width	340 mm
Height	337,5 mm
Depth	232 mm
Width with packaging	365 mm
Height with packaging	365 mm
Depth with packaging	250 mm
EX designation in accordance with the ATEX Directive	Ex II 2 D
EX designation in accordance with standard	Ex tb IIIC T200°C Db IP64 / Ex h IIIC T200°C Db
Ta ambient temperature	-20 °C ≤ Ta ≤ +50 °C
I <sub>A</sub> /I <sub>N</sub>	3,5

# ERM 25 Ex t


Time $t_E$	19
Operating mode	S1
EC type examination certificate	TÜV-A 18ATEX0054 X, IECEx EPS 19.0025X
Temperature class	T200°C
Capacitor capacity / voltage	16µF/280V
Temperature class of insulating materials Th. Cl.	155 (F)
Packing unit	1 piece
Range	G
GTIN (EAN)	4012799804680

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA5, high</sub></b> <b>(dB(A))</b>	43	57	65	70	74	69	64	58	77

L<sub>WA5</sub>= free inlet sound power level in dB.

## Characteristic curve

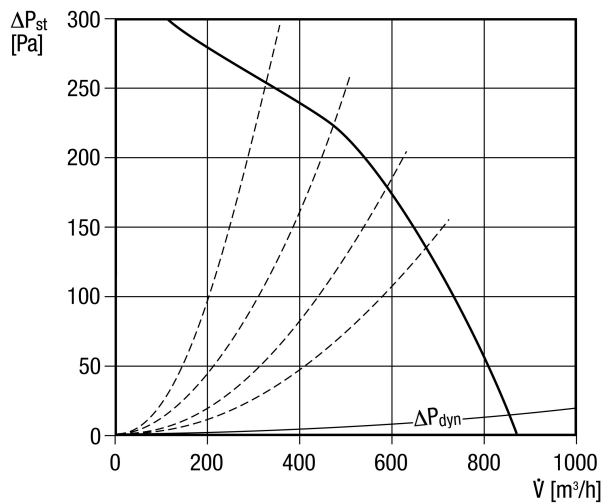

# ERM 25 Ex t

Dimensioned drawing [mm]

