

ERM 25 Ex t/60 Hz



Short description

Semi-centrifugal duct fan, DN 250, single-phase AC 230 V/60 Hz, explosion-proof, medium: dust

Article number 0080.0378

Technical data

| | |
|--|---|
| Air flow volume | 1.010 m ³ /h |
| Rotating speed | 3.200 1/min |
| Speed controllable | – |
| Type of voltage | Alternating current |
| Rated voltage | 230 V |
| Frequency | 60 Hz |
| Nominal output | 495 W |
| cosφ | 0,97 |
| I _{nom} | 2,2 A |
| I _{max} at U _{Nominal} | 2,2 A |
| Degree of protection | IP 64 |
| Insulation class | F |
| Mains cable | 3 x 1,5 mm ² |
| Housing material | Synthetic material |
| Impeller material | Synthetic material |
| Colour | Signal black, similar to RAL 9004 |
| Weight | 7,18 kg |
| Weight including packaging | 7,38 kg |
| Nominal size | 250 mm |
| Width | 340 mm |
| Height | 337,5 mm |
| Depth | 232 mm |
| Width with packaging | 365 mm |
| Height with packaging | 365 mm |
| Depth with packaging | 250 mm |
| EX designation in accordance with the ATEX Directive | Ex II 2 D |
| EX designation in accordance with standard | Ex tb IIIC T200°C Db IP64 / Ex h IIIC T200°C Db |
| Ta ambient temperature | -20 °C ≤ Ta ≤ +50 °C |
| I _A /I _N | 2,2 |

ERM 25 Ex t/60 Hz


| | |
|---|--|
| Time t_E | 41 |
| Operating mode | S1 |
| EC type examination certificate | TÜV-A 18ATEX0054 X, IECEx tPS 19.0025X |
| Temperature class | T200°C |
| Capacitor capacity / voltage | 16µF/280V |
| Temperature class of insulating materials Th. Cl. | 155 (F) |
| Packing unit | 1 piece |
| Range | G |
| GTIN (EAN) | 4012799803782 |

Sound power level in octave range

| | 63 Hz | 125 Hz | 250 Hz | 500 Hz | 1 kHz | 2 kHz | 4 kHz | 8 kHz | Total |
|--|-------|--------|--------|--------|-------|-------|-------|-------|-------|
| L_{WA5, high} (dB(A)) | 45 | 59 | 69 | 73 | 78 | 74 | 68 | 62 | 81 |

L_{WA5}= free inlet sound power level in dB.

Characteristic curve

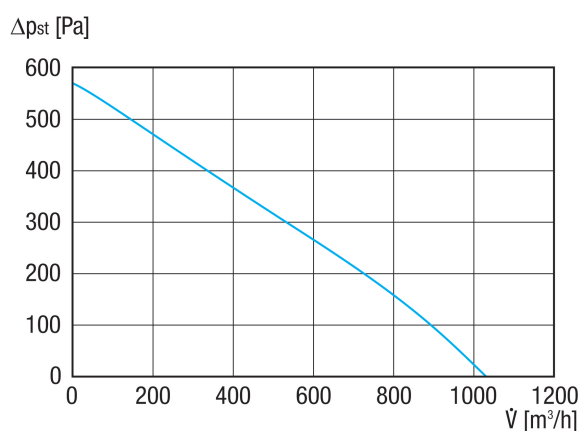

ERM 25 Ex t/60 Hz

Dimensioned drawing [mm]

