

# ERR 25/1 EC



## Short description

Centrifugal duct fan, DN 250, motor with EC technology

## Application examples

Machine extraction unit, Workplace air extraction system, Production site

Article number 0073.0571

## Technical data

Air flow volume	855 m³/h
Rotating speed	3.395 1/min
Impeller type	radial
Speed controllable	✓
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Nominal output	85 W
I <sub>max</sub>	0,8 A
Degree of protection	IP X4
Insulation class	F
Pole-changeable	–
Installation site	Duct
Installation position	vertical / horizontal
Material	Sheet steel, powder coated
Housing material	Sheet steel, powder coated
Colour	Light grey
Weight	5 kg
Weight including packaging	5,5 kg
Nominal size	250 mm
Width	230 mm
Height	368 mm
Depth	333 mm
Width with packaging	300 mm
Height with packaging	390 mm
Depth with packaging	390 mm
Airstream temperature at I <sub>Max</sub>	60 °C
Sound pressure level	35 dB(A) (Distance 3 m, Free-field conditions)

ERR 25/1 EC


Packing unit	1 piece
Range	E
GTIN (EAN)	4012799735717

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA3, S3</sub></b> <b>(dB(A))</b>	–	–	–	–	–	–	–	–	55

LWA3  
Distance 3 m, Free-field conditions

Characteristic curve

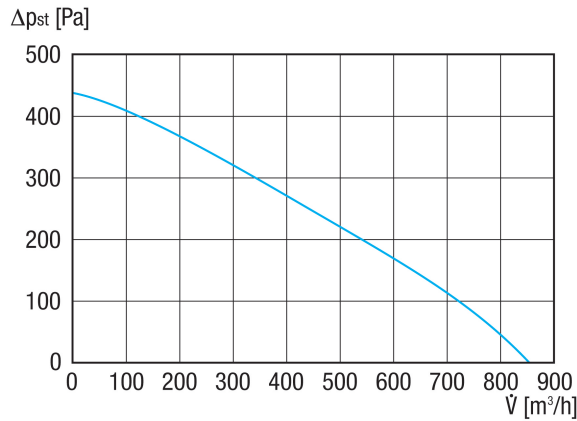

## ERR 25/1 EC

Dimensioned drawing [mm]

