


KSP 22/15

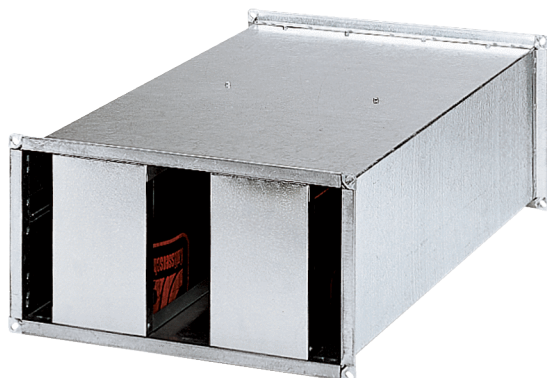

Short description

Attenuating sound absorber, channel dimensions 500 mm x 250 mm


Article number 0092.0301

Technical data


Min. flow velocity	
Max. flow velocity	20 m/s
Installation site	Channel
Housing material	Sheet steel, galvanised
Weight	19,8 kg
Weight including packaging	19,8 kg
Channel dimension	500 mm x 250 mm
Width	540 mm
Height	290 mm
Depth	900 mm
Width with packaging	540 mm
Height with packaging	290 mm
Depth with packaging	900 mm
Insertion loss at 63 Hz	1 dB
Insertion loss at 125 Hz	4 dB
Insertion loss at 250 Hz	15 dB
Insertion loss at 500 Hz	19 dB
Insertion loss at 1 kHz	22 dB
Insertion loss at 2 kHz	16 dB
Insertion loss at 4 kHz	11 dB
Insertion loss at 8 kHz	10 dB
Total insertion loss	
Insertion loss note	
Packing unit	1 piece
Range	D
GTIN (EAN)	4012799923015

KSP 22/15

Characteristic curve for KSP 22/15, KSP 28/14, KSP 31/14 and 35/14

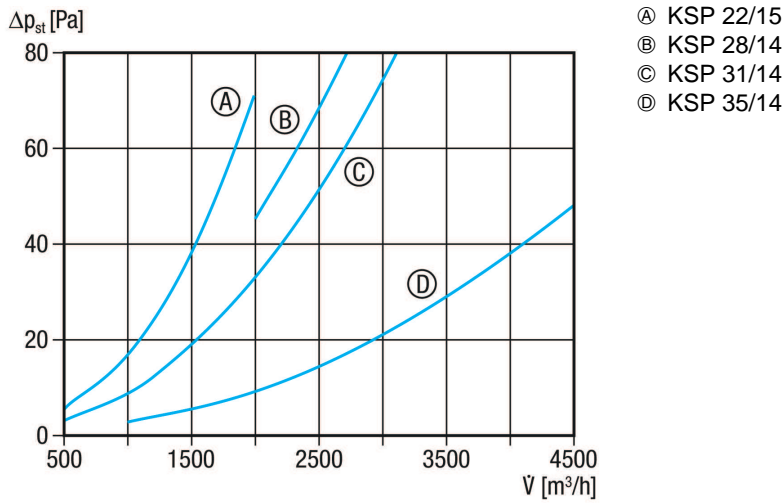

Dimensioned drawing [mm]

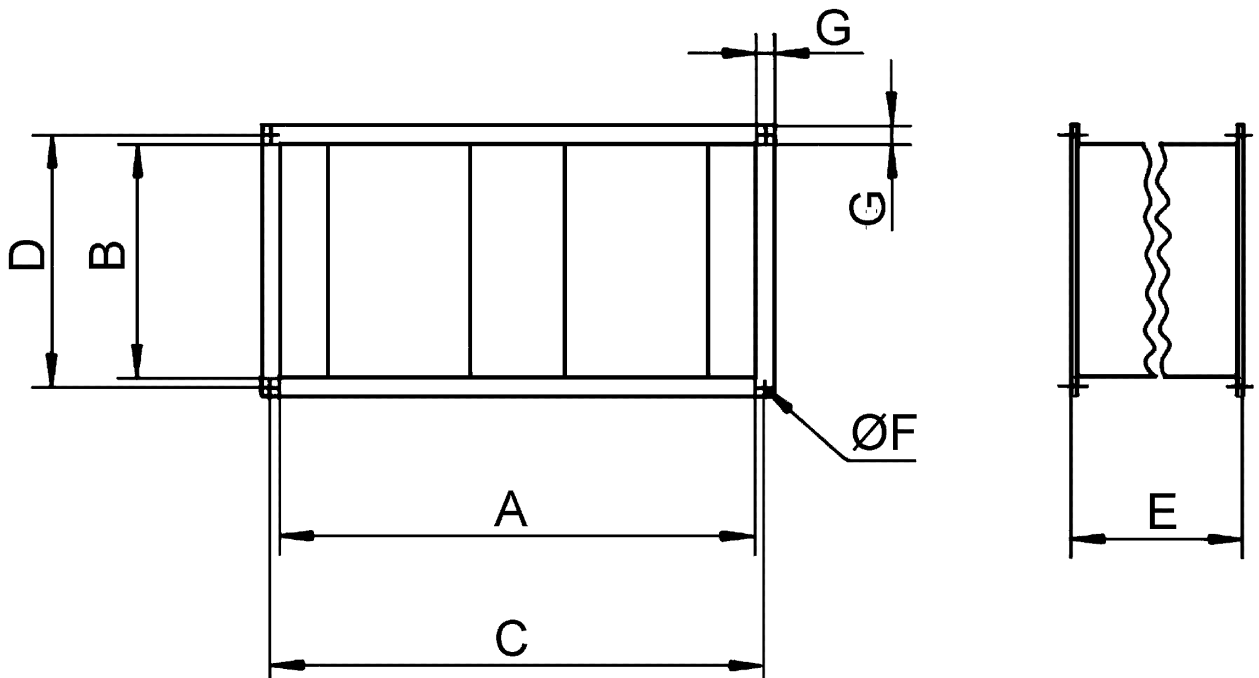

A	B	C	D	E	F	G
500	250	520	270	900	9	20

KSP 22/15

