# KSP 22/27





### Short description

Attenuating sound absorber, channel dimensions 600 mm  $\times$  250 mm

Article number 0092.0330


#### Technical data

Min. flow velocity			
Max. flow velocity	20 m/s		
Installation site	Channel		
Housing material	Sheet steel, galvanised		
Weight	33 kg		
Weight including packaging	33 kg		
Channel dimension	600 mm x 250 mm		
Width	640 mm		
Height	290 mm		
Depth	1.250 mm		
Width with packaging	640 mm		
Height with packaging	290 mm		
Depth with packaging	1.250 mm		
Insertion loss at 63 Hz	5 dB		
Insertion loss at 125 Hz	12 dB		
Insertion loss at 250 Hz	27 dB		
Insertion loss at 500 Hz	26 dB		
Insertion loss at 1 kHz	29 dB		
Insertion loss at 2 kHz	23 dB		
Insertion loss at 4 kHz	16 dB		
Insertion loss at 8 kHz	14 dB		
Total insertion loss			
Insertion loss note			
Packing unit	1 piece		
Range	D		
GTIN (EAN)	4012799923305		

## KSP 22/27




### Characteristic curve



- ① KSP 22/27
- ② KSP 25/27
- ③ KSP 28/23
- © KSP 35/23, KSP 94/28
- 6 KSP 50/23
- ⑦ KSP 56/25

### Dimensioned drawing [mm]

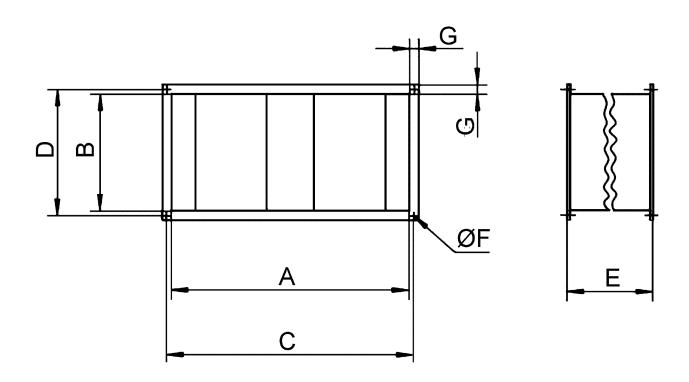

Α	В	С	D	E	F	G
600	250	620	270	1.250	12	20

### **PRODUCT**DATA SHEET

KSP 22/27

