


KSP 25/15

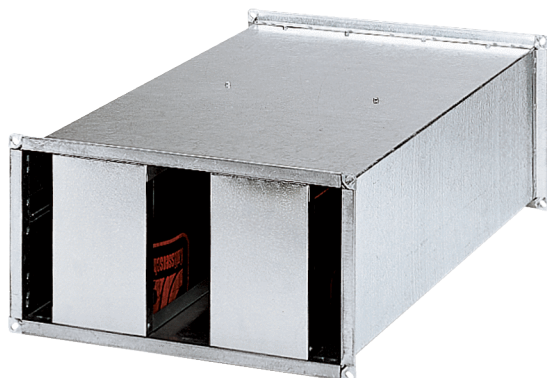

Short description

Attenuating sound absorber, channel dimensions 500 mm x 300 mm


Article number 0092.0302

Technical data


Min. flow velocity	
Max. flow velocity	20 m/s
Installation site	Channel
Housing material	Sheet steel, galvanised
Weight	22,07 kg
Weight including packaging	22,1 kg
Channel dimension	500 mm x 300 mm
Width	540 mm
Height	340 mm
Depth	900 mm
Width with packaging	541 mm
Height with packaging	345 mm
Depth with packaging	905 mm
Insertion loss at 63 Hz	1 dB
Insertion loss at 125 Hz	4 dB
Insertion loss at 250 Hz	15 dB
Insertion loss at 500 Hz	19 dB
Insertion loss at 1 kHz	22 dB
Insertion loss at 2 kHz	16 dB
Insertion loss at 4 kHz	11 dB
Insertion loss at 8 kHz	10 dB
Total insertion loss	
Insertion loss note	
Packing unit	1 piece
Range	D
GTIN (EAN)	4012799923022

KSP 25/15

Characteristic curve for KSP 22/15, KSP 28/14, KSP 31/14 and 35/14

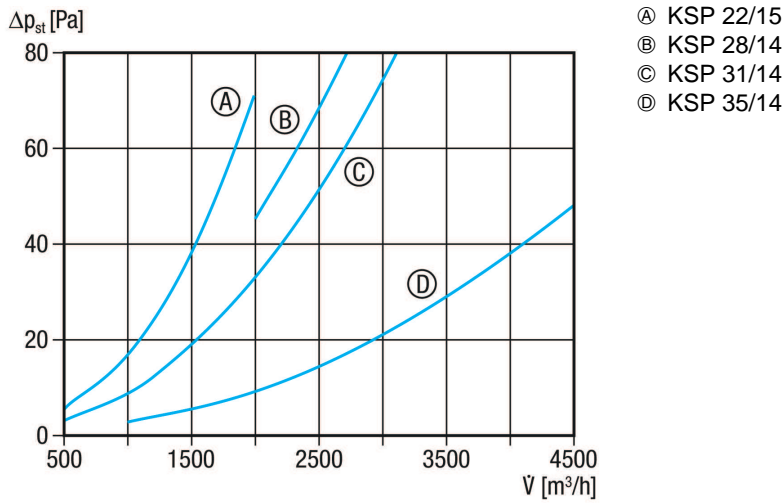

Dimensioned drawing [mm]

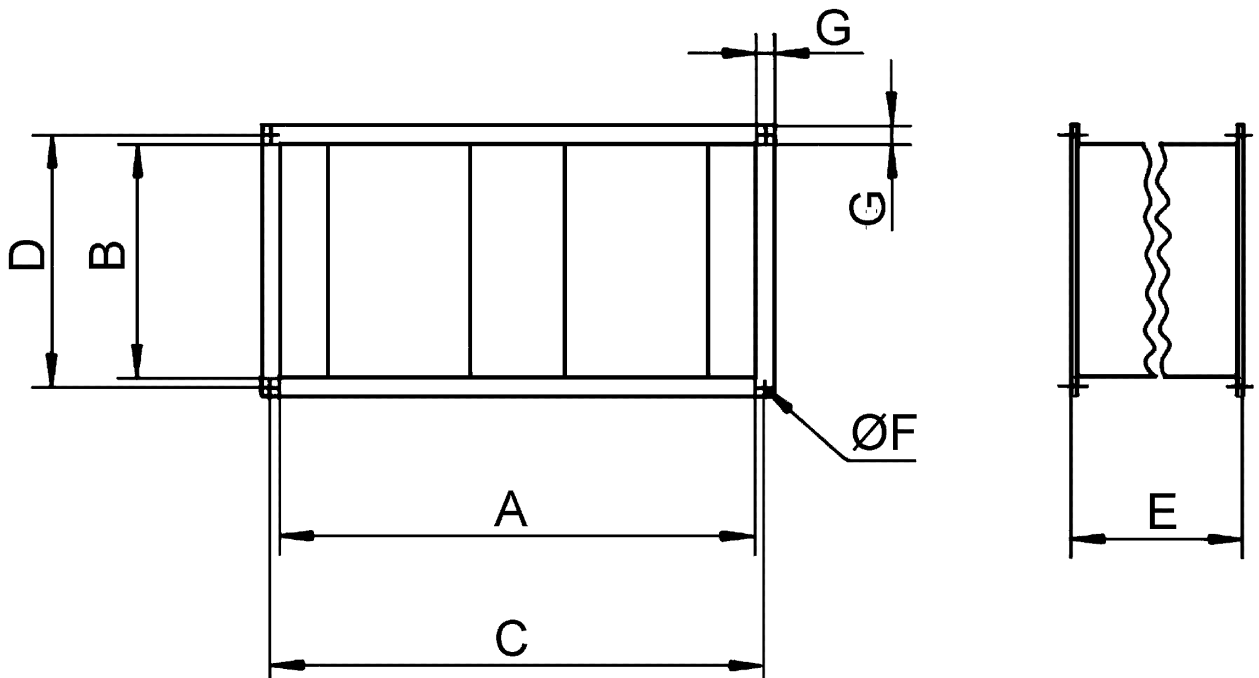

A	B	C	D	E	F	G
500	300	520	320	900	9	20

KSP 25/15

