KSP 94/28





Short description

Attenuating sound absorber, channel dimensions 900 mm \times 400 mm

Article number 0092.0505


Technical data

	1		
Min. flow velocity			
Max. flow velocity	20 m/s		
Installation site	Channel		
Housing material	Sheet steel, galvanised		
Weight	53 kg		
Weight including packaging	53 kg		
Channel dimension	900 mm x 400 mm		
Width	940 mm		
Height	440 mm		
Depth	1.250 mm		
Width with packaging	940 mm		
Height with packaging	440 mm		
Depth with packaging	1.250 mm		
Insertion loss at 63 Hz	4 dB		
Insertion loss at 125 Hz	16 dB		
Insertion loss at 250 Hz	28 dB		
Insertion loss at 500 Hz	28 dB		
Insertion loss at 1 kHz	33 dB		
Insertion loss at 2 kHz	27 dB		
Insertion loss at 4 kHz	17 dB		
Insertion loss at 8 kHz	13 dB		
Total insertion loss			
Insertion loss note			
Packing unit	1 piece		
Range	D		
GTIN (EAN)	4012799925057		

KSP 94/28




Characteristic curve



- ① KSP 22/27
- ② KSP 25/27
- ③ KSP 28/23
- © KSP 35/23, KSP 94/28
- 6 KSP 50/23
- ⑦ KSP 56/25

Dimensioned drawing [mm]

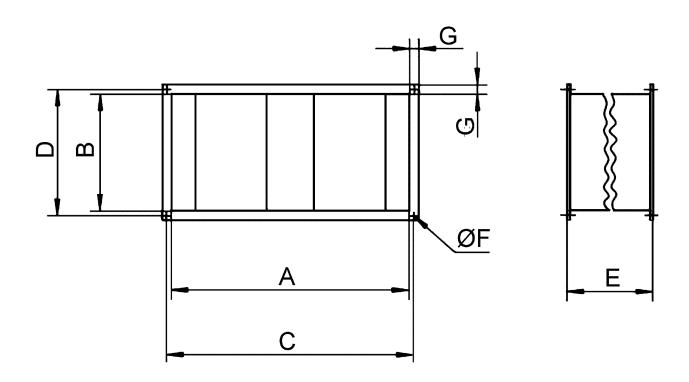

Α	В	С	D	Е	F	G
900	400	920	420	1.250	9	20

PRODUCTDATA SHEET

KSP 94/28

