

MF-F63



Short description

Flexible PE-HD duct, length 50 m, external diameter 63 mm, max. 20 m³/h, bending radius ≥ 150 mm

Application examples

Single-family house, Multiple family unit, Industrial building, Office buildings, Modernizations


Article number 0055.0097

Technical data

| | |
|-------------------------------|---|
| Air direction | Ventilation and air extraction |
| Volumetric flow | 20 m³/h (recommended) |
| Installation site | Ceiling / Floor / Wall |
| Material | Polyethylene (PE) |
| Synthetic material definition | PVC-free |
| Fire behaviour | Normally inflammable building material (fire behaviour E according to DIN EN 13501-1: 2010) |
| Annular rigidity | ≥ 8 kN/m² in accordance with EN ISO 9969 |
| Weight | 16,5 kg |
| Weight including packaging | 17 kg |
| Nominal size | 63 mm |
| Internal diameter | 53,5 mm |
| Length | 50 m |
| Width | 64 mm |
| Height | 64 mm |
| Depth | 50.000 mm |
| Width with packaging | 1.082 mm |
| Height with packaging | 332 mm |
| Depth with packaging | 1.082 mm |
| Minimum bend radius | 150 mm |
| Ambient temperature | -20 °C up to 60 °C |
| Packing unit | 1 x 50 m roll |
| Range | K |
| GTIN (EAN) | 4012799550976 |

MF-F63

Characteristic curve

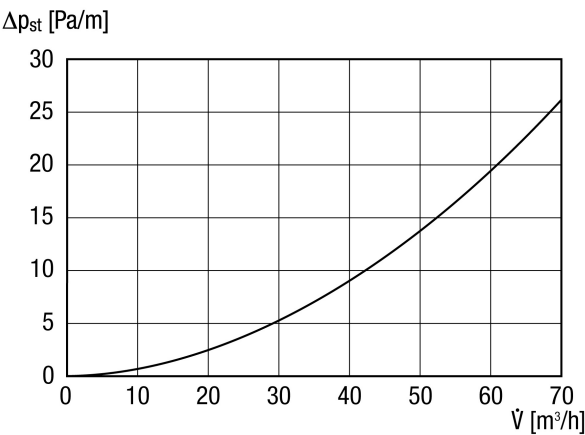

Dimensioned drawing [mm]

