

MF-F90



Short description

Flexible PE-HD duct, length 50 m, external diameter 90 mm, max. 50 m³/h, bending radius ≥ 300 mm

Application examples

Single-family house, Multiple family unit, Industrial building, Office buildings, Modernizations


Article number 0055.0095

Technical data

Air direction	Ventilation and air extraction
Volumetric flow	50 m³/h (recommended)
Installation site	Ceiling / Floor / Wall
Material	Polyethylene (PE)
Synthetic material definition	PVC-free
Fire behaviour	Normally inflammable building material (fire behaviour E according to DIN EN 13501-1: 2010)
Annular rigidity	≥ 8 kN/m² in accordance with EN ISO 9969
Weight	23 kg
Weight including packaging	23,5 kg
Nominal size	90 mm
Internal diameter	77,5 mm
Length	50 m
Width	90 mm
Height	90 mm
Depth	50.000 mm
Width with packaging	1.302 mm
Height with packaging	452 mm
Depth with packaging	1.302 mm
Minimum bend radius	350 mm
Ambient temperature	-20 °C up to 60 °C
Packing unit	1 x 50 m roll
Range	K
GTIN (EAN)	4012799550952

MF-F90

Characteristic curve

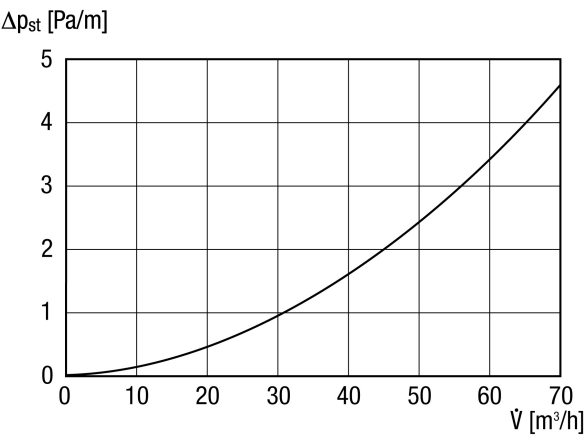

Dimensioned drawing [mm]

