

MK 20



Short description

Electric shutter with gear motor for ventilation channels, DN 200


Article number 0093.0906

Technical data

| | |
|----------------------------|------------------------------------|
| Type of voltage | Alternating current |
| Rated voltage | 230 V |
| Frequency | 50 Hz |
| Nominal output | 3 W |
| I_{nom} | 0,015 A |
| Maximum load | 0,015 A |
| Degree of protection | IP 55 |
| Drive | Gear |
| Installation | outside |
| Installation site | Wall |
| Installation position | vertical |
| Material | Synthetic material |
| Colour | Traffic white, similar to RAL 9016 |
| Lamella colour | Silver grey |
| Weight | 1,16 kg |
| Weight including packaging | 1,32 kg |
| Type of shutter | electrical |
| Suitable for nominal size | 200 mm |
| Width | 325 mm |
| Height | 325 mm |
| Depth | 50,5 mm |
| Width with packaging | 335 mm |
| Height with packaging | 330 mm |
| Depth with packaging | 60 mm |
| Ambient temperature | 40 °C |
| Packing unit | 1 piece |
| Range | C |
| GTIN (EAN) | 4012799939061 |

MK 20

Dimensioned drawing [mm]

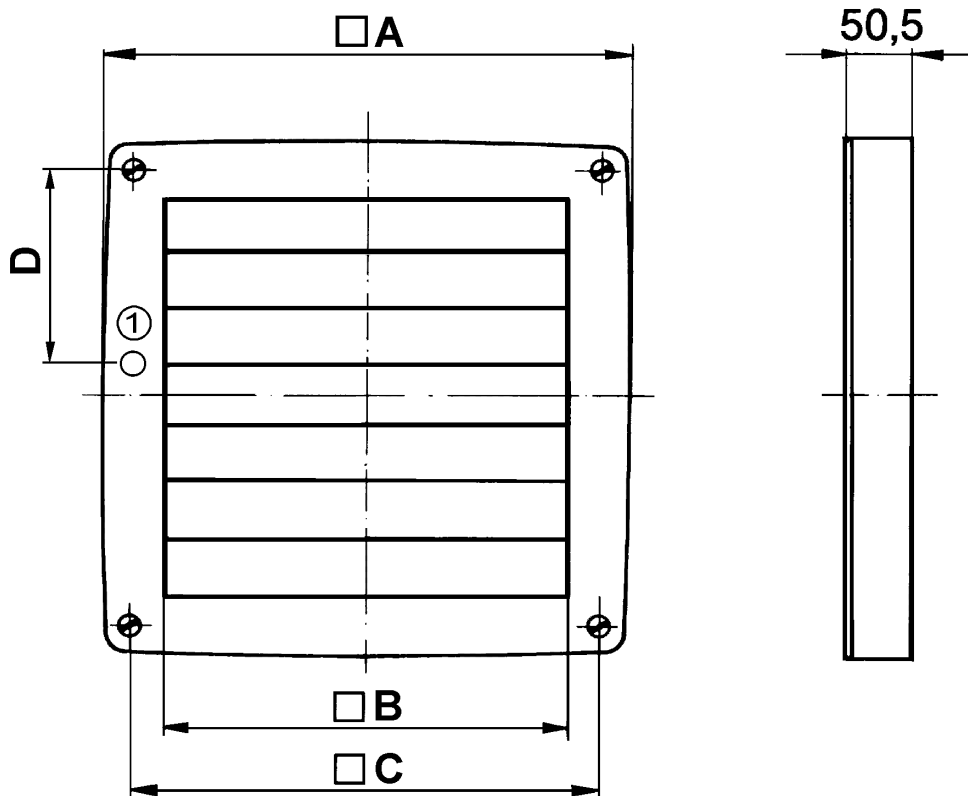

| A | B | C | D |
|-----|-----|-----|----|
| 325 | 218 | 275 | 83 |

① Cable entry