

# RLT 5500 MV4555VR-Mode 3



## Short description

Centralised compact air handling unit with heat recovery.  
Version: Vertical with supply and exhaust air connection on the right, constant pressure operation, with cross-counter-flow heat exchanger, without preheating register, without supplementary heat register, air flow volume up to 5500 m<sup>3</sup>/h

Article number 0040.2614

## Technical data

Model	Right-hand version: Supply air and exhaust air connection on the right / Standard/without heat register
Air flow volume	1.000 m <sup>3</sup> /h / 6.900 m <sup>3</sup> /h
Nominal air volume	5.500 m <sup>3</sup> /h
ErP / LOT 6	NRVU / BVU, SFPint 1205 (W/(m <sup>3</sup> /s))
Mode	Pressure constancy
Rated voltage	400 V/~3/N/PE
Frequency	50 Hz
I <sub>max</sub> Unit	8,7 A
Degree of protection	IP 44
Recommended fuse unit	16 A
Nominal power consumption	1.840 W
Note Nominal power consumption	against 200 Pa external
Installation site	inside / outside
Material	Metal
Housing material	Sheet steel, galvanised
Housing insulation	45 mm rock wool (70 kg/m <sup>3</sup> ), classification A1 according to DIN 4102
Colour	Telegray, similar to RAL 7047
Weight	1.089 kg
Weight including packaging	1.130 kg
Type of filter	Pleated filter
Filter class	ISO ePM10 ≥ 50% (M5) ISO ePM1 ≥ 50% (F7)
Fire protection	Fire protection class A1
Connection diameter of condensation drain	3/4"
Socket height, suction side	730 mm
Socket width, suction side	1.224 mm
Socket circumference, suction side	
Socket circumference, suction side, old	630 mm
Socket height, pressure side	730 mm

# RLT 5500 MV4555VR-Mode 3


Socket width, pressure side	1.224 mm
Socket circumference, pressure side	
Socket circumference, pressure side, old	630 mm
Width	3.240 mm
Height	1.930 mm
Depth	1.469 mm
Width with packaging	3.360 mm
Height with packaging	1.990 mm
Depth with packaging	1.520 mm
Ambient temperature	-20 °C up to 40 °C
Heat exchanger construction type	Cross-counterflow
Efficiency	82.6% nominal according to ErP (without condensation)
EN 1886 classification	T2/TB2/L2/D1/F9
Packing unit	1 piece
Range	X
GTIN (EAN)	4012799982586

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA5</sub> (dB(A))</b>	41	48	49	49	44	39	28	15	54
<b>L<sub>WA6</sub> (dB(A))</b>	49	49	53	65	62	58	49	40	68

L<sub>WA5</sub>= free inlet sound power level in dB.  
 L<sub>WA6</sub>= free outlet sound power level in dB.


## Characteristic curve

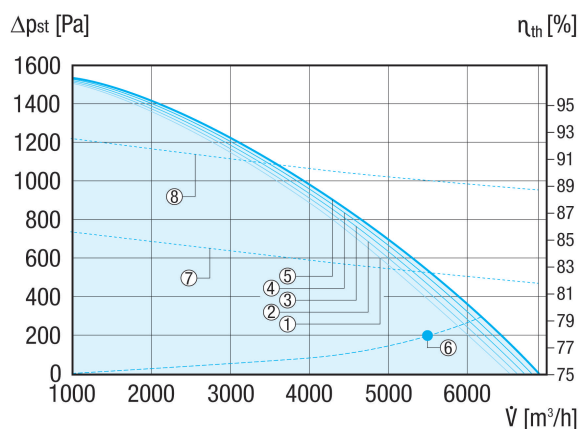

- 1) With electric preheating register [PH] and electric supplementary heat register [EH]
- 2) With electric preheating register [PH] and PWW supplementary heat register [WH]
- 3) With electric preheating register [PH] or electric supplementary heat register [EH]
- 4) With PWW supplementary heat register [WH]
- 5) Without heat register
- 6) Operating point in accordance with ErP (EU Regulation No. 1253/2014)
- 7) Thermal efficiency (according to ErP without condensation)
- 8) Thermal efficiency (according to DIN EN 13141-7 (A7) with condensation)

# RLT 5500 MV4555VR-Mode 3

Dimensioned drawing [mm]

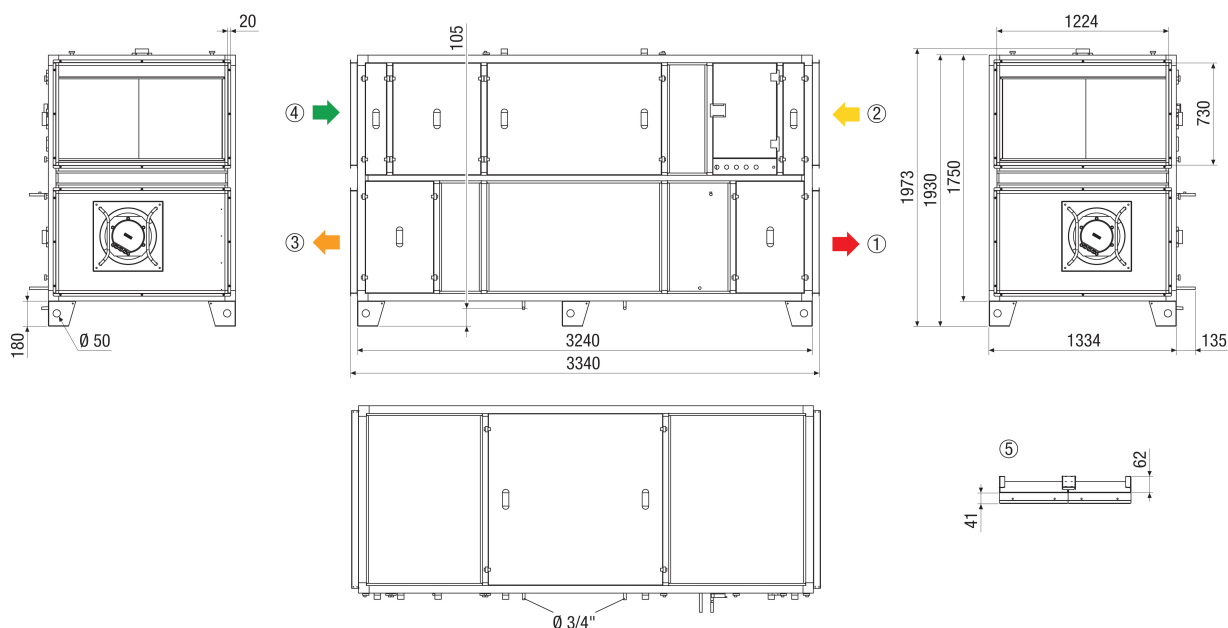

- 1 = Supply air
- 2 = Exhaust air
- 3 = Outgoing air
- 4 = Outside air
- 5 = Roof detail