

RSR 20/50



Short description

Tubular sound absorber with 50 mm sound absorbing cover, length: 1,000 mm, DN 200 $\,$

Application examples

Showroom, Restaurant, Theatre, Production site, Industrial building

Article number

0092.0326

Technical data

Model	50 mm sound absorbing cover		
Material	Aluminium		
Weight	2,34 kg		
Weight including packaging	3,07 kg		
Nominal size	200 mm		
Width	1.120 mm		
Height	312,5 mm		
Depth	312,5 mm		
Width with packaging	1.180 mm		
Height with packaging	315 mm		
Depth with packaging	315 mm		
Insertion loss at 63 Hz	3 dB		
Insertion loss at 125 Hz	4 dB		
Insertion loss at 250 Hz	9 dB		
Insertion loss at 500 Hz	16 dB		
Insertion loss at 1 kHz	32 dB		
Insertion loss at 2 kHz	22 dB		
Insertion loss at 4 kHz	15 dB		
Insertion loss at 8 kHz	15 dB		
Total insertion loss			
Insertion loss note			
Sound insulation	yes		
Packing unit	1 piece		
Range	С		
GTIN (EAN)	4012799923268		


RSR 20/50

Characteristic curve Pressure losses




① Pressure loss in Pa/m sound absorber

2 Duct diameter ③ Velocity of flow



Dimensioned drawing [mm]

ш ∢ Ш 1000 С

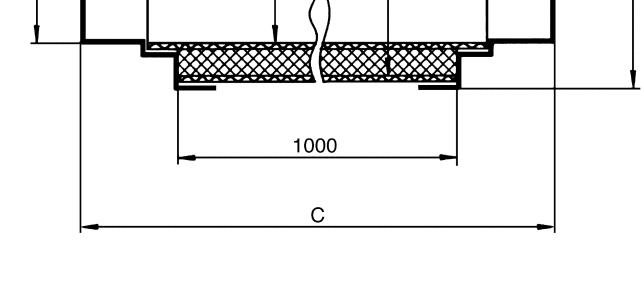

RSR 20/50



	А	В	С	D	E
_	200	300	1.120	199,5	312,5