

# DSR 35 S



## Short description

Sound-insulated ventilation box with swivelling fan, DN 355, three-phase AC

Article number 0080.0232

## Technical data

Air flow volume	2.865 m <sup>3</sup> /h
Rotating speed	1.360 1/min
Speed controllable	–
Type of voltage	Three-phase AC
Rated voltage	400 V
Nominal output	470 W
I <sub>nom</sub>	1,18 A
I <sub>max</sub>	1,3 A
Mains cable	5 x 1,5 mm <sup>2</sup>
Weight	46
Swivelling fan	–
Nominal size	355 mm
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799802327

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA5</sub>, S5</b> <b>(dB(A))</b>	–	59	64	52	53	52	47	41	66
<b>L<sub>WA6</sub>, S5</b> <b>(dB(A))</b>	–	64	69	68	67	64	59	52	74
<b>L<sub>WA2</sub>, S5</b> <b>(dB(A))</b>	–	53	56	44	40	36	35	33	58


L<sub>WA2</sub>= housing sound power level in dB.

L<sub>WA5</sub>= free inlet sound power level in dB.

L<sub>WA6</sub>= free outlet sound power level in dB.

# DSR 35 S

## Characteristic curve

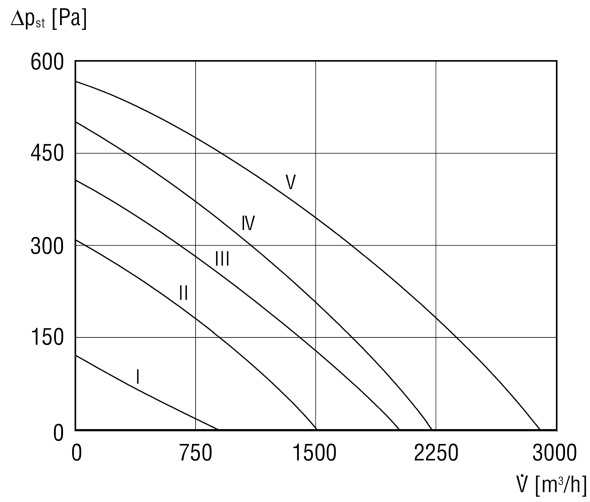

## Dimensioned drawing [mm]

