


DZQ 71/6 A

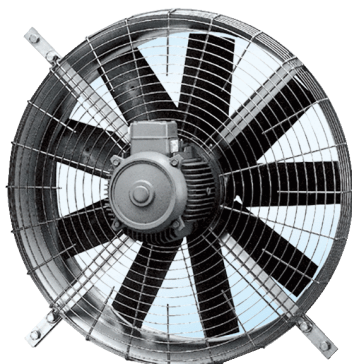

Short description

Axial wall fan with square wall plate, DN 710, three-phase AC

Application examples

Production site, Industrial building, Storage facility, Laboratory, Workshop

Article number 0083.0642

Technical data

Model	Square wall plate
Air flow volume	16.000 m ³ /h
Rotating speed	930 1/min
Speed controllable	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Nominal output	1.100 W
I _{nom}	2,2 A
I _{max}	2,5 A
Degree of protection	IP 54
Insulation class	F
Mains cable	5 x 1,5 mm ²
Installation position	horizontal
Material	Sheet steel, galvanised
Weight	45
Nominal size	710 mm
Airstream temperature at nominal current	60 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799836421

Sound power level in octave range


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L _{WA7, S5} (dB(A))	44	65	68	77	76	76	72	59	82
L _{WA8, S5} (dB(A))	63	72	74	82	82	82	82	79	89

DZQ 71/6 A


L_{WA7} = housing and free inlet sound power level in dB.

L_{WA8} = housing and free outlet sound power level in dB.

Characteristic curve

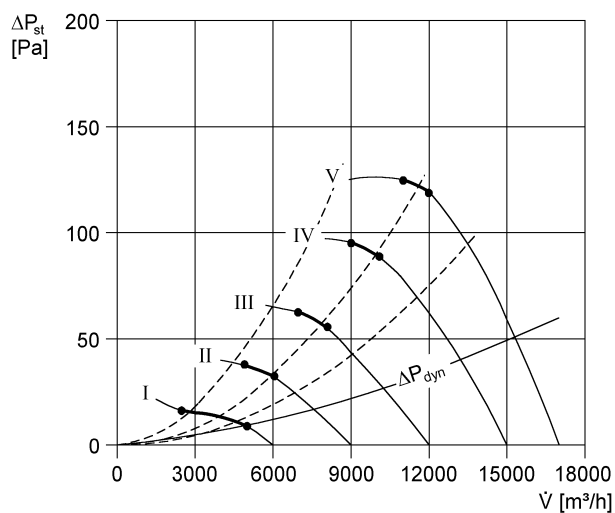


Dimensioned drawing [mm]

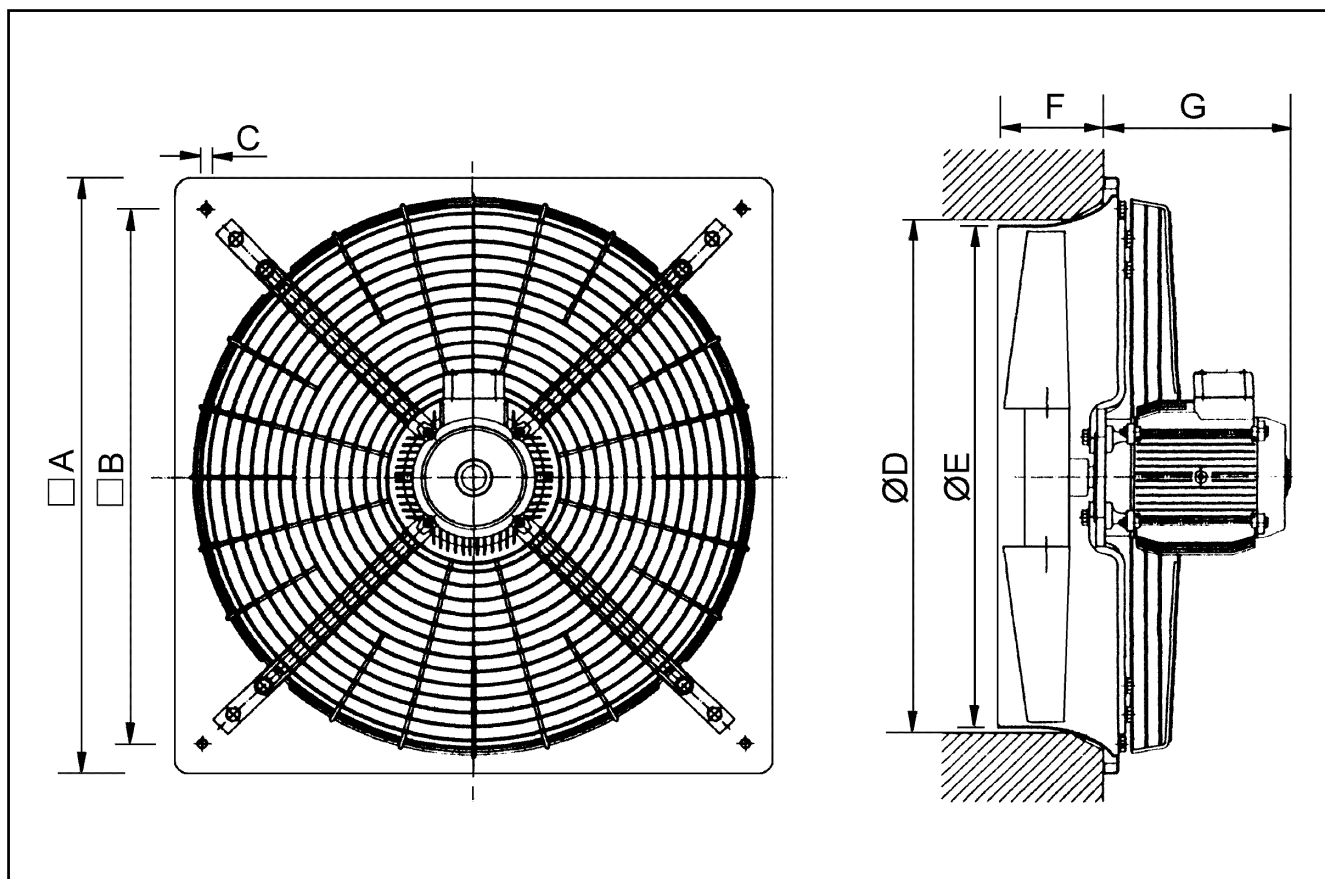

DZQ 71/6 A

A	B	C	D	E	F	G
260	762	14	775	711	150	260

Dimensioned drawing [mm]

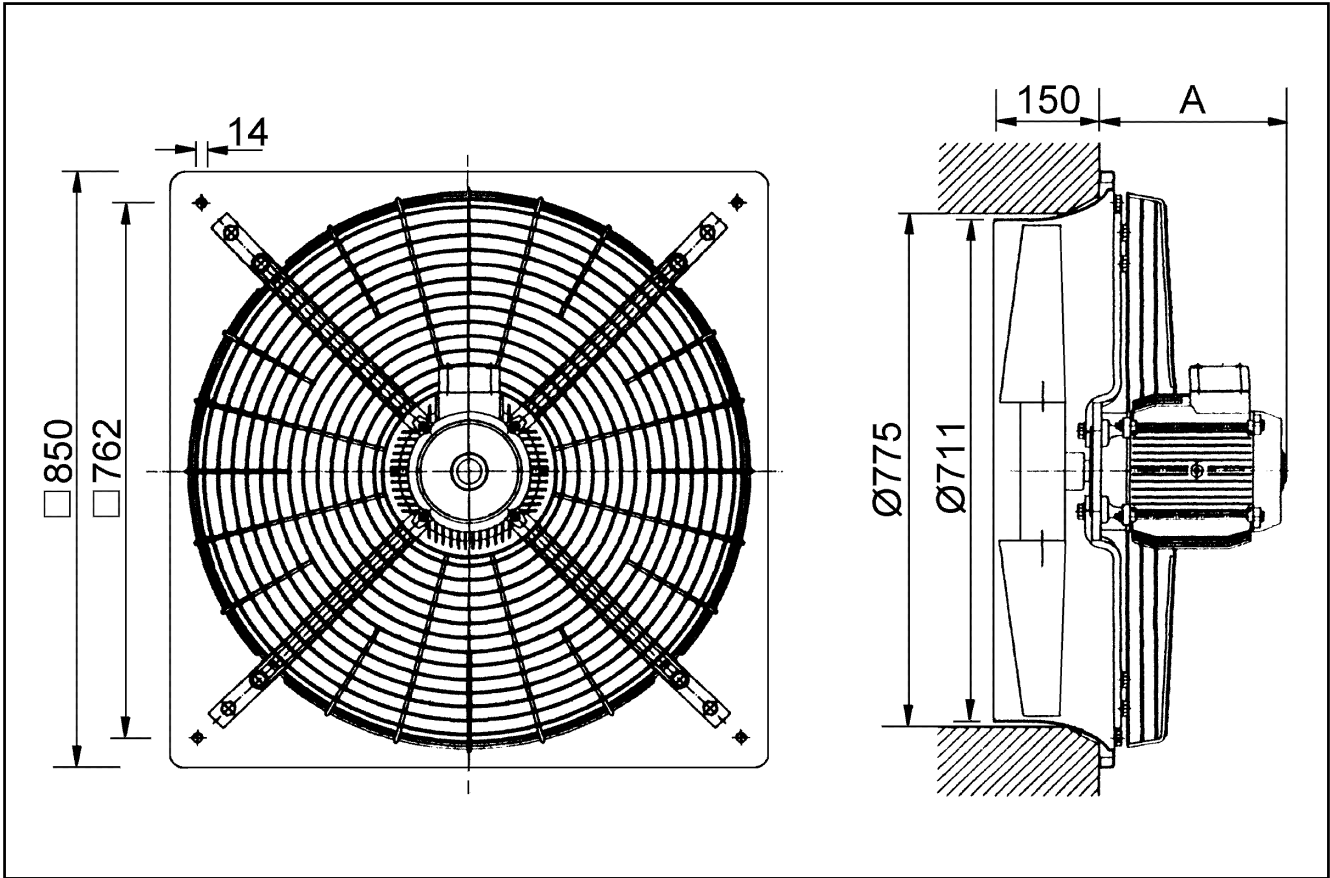

A	B	C	D	E	F	G
260	762	14	775	711	150	260