

EN 25



Short description

EN model series

Application examples

Restaurant, Showroom, Building container, Lecture room, Nursery school

Article number 0081.0302

Technical data

Air flow volume	750 m ³ /h
Rotating speed	1.260 1/min
Air direction	Air extraction
Speed controllable	✓
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Nominal output	40 W
Power consumption	47 W
I _{nom}	0,25 A
I _{max}	0,28 A
Installation site	Wall
Type of installation	Surface-mounted
Installation position	horizontal
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	3,105
Nominal size	250 mm
Sound pressure level	54 dB(A)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799813026


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L _{WA7, high} (dB(A))	–	–	–	–	–	–	–	–	60

EN 25

L_{WA7} = housing and free inlet sound power level in dB.

Characteristic curve

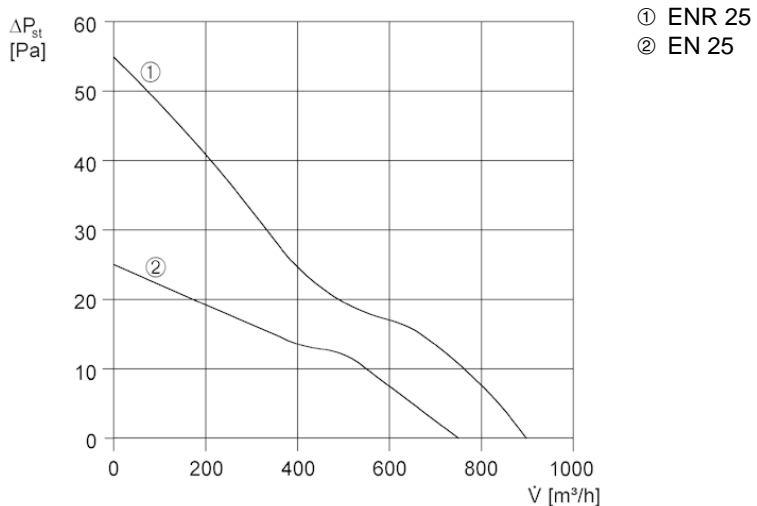

Dimensioned drawing [mm]

