RSR 25/50





Short description

Tubular sound absorber with 50 mm sound absorbing cover, length: 1,000 mm, DN 250

Application examples

Showroom, Restaurant, Theatre, Production site, Industrial building

Article number 0092.0327


Technical data

Model	50 mm sound absorbing cover	
Material	Aluminium	
Weight	2,88 kg	
Weight including packaging	3,89 kg	
Nominal size	250 mm	
Width	1.170 mm	
Height	326,5 mm	
Depth	326,5 mm	
Width with packaging	1.200 mm	
Height with packaging	380 mm	
Depth with packaging	380 mm	
Insertion loss at 63 Hz	2 dB	
Insertion loss at 125 Hz	4 dB	
Insertion loss at 250 Hz	8 dB	
Insertion loss at 500 Hz	16 dB	
Insertion loss at 1 kHz	33 dB	
Insertion loss at 2 kHz	15 dB	
Insertion loss at 4 kHz	11 dB	
Insertion loss at 8 kHz	12 dB	
Total insertion loss		
Insertion loss note		
Sound insulation	yes	
Packing unit	1 piece	
Range	С	
GTIN (EAN)	4012799923275	

RSR 25/50




Characteristic curve Pressure losses



- ① Pressure loss in Pa/m sound absorber
- ② Duct diameter
- ③ Velocity of flow

Dimensioned drawing [mm]

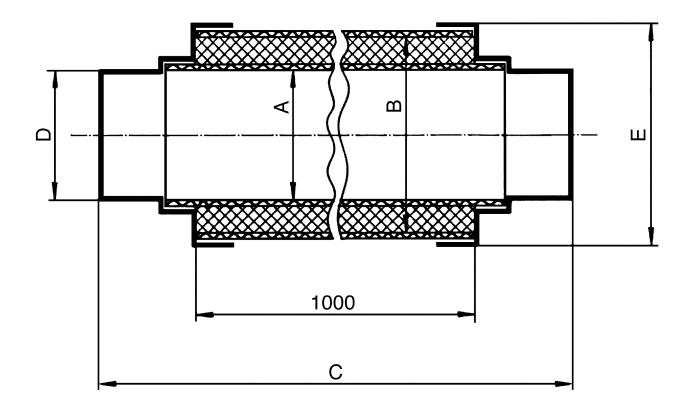

RSR 25/50



Α	В	С	D	E
250	355	1.170	249,4	362,5